

Specifications

Width: 5.65m

Length: 6.00m

Side height: 1.70m

Peak height: 2.70m

Bay distance: 2.00m

Area: 33.90 m²

Snow load: 0 km/m²

Wind load: 60 km/h

Aluminium type: anodized aluminium profiles

Main profile size: 40/ 1.5 mm – profile 85

Covering: Robust industrial grade PVC,

650g/m² coated polyester fabric. Flame



retardant according to DIN 4102 B1, M2

Packaging Dimensions

Longest part: 2.44m

Weight (approx.): 130.00 kg

Transport dimensions: 1 Bundle (2.60m x 0.80m x 0.50m)

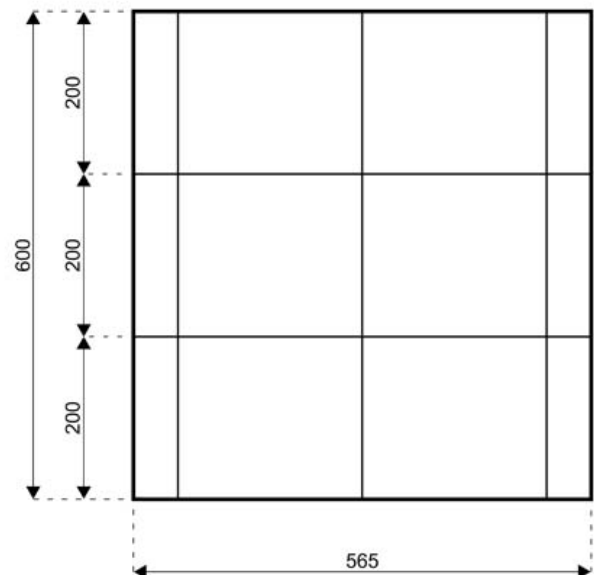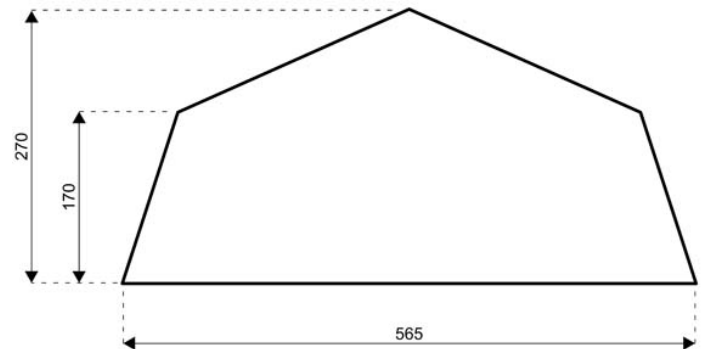



STRUCTURE FEATURES

- Frame made of anodized Aluminium tubes (40 x 1.5 mm)
- Connection made from Aluminium couplings
- Easy and fast push-fit system
- No tools for set up required
- Ground anchors made from steel, galvanised, length: 30cm
- Including storm wires



COVER FEATURES

- Robust industrial grade PVC, 650g/m² coated polyester fabric. Flame retardant according to DIN 4102 B1, M2
- Standard colour: PVC (Green/ White)
- Entrance on each gable side
- Cover will be fixed into structure with straps
- Mudflap fixed at covers end
- Mudflap made from PVC in grey colour
- Roof cover with 2 windows, one window on each side
- Dimensions of the windows: 60 cm x 40 cm
- With mosquito netting and flap
- Breathable
- Waterproof
- Tear proof
- Pack bags made from PVC for covers and all parts of structure





TYPES OF ACCESSORIES

- Flooring system
- Partition wall
- Roll able side entrance
- Connection from tent to tent
- Covers made from PVC material in different colours
- Electrical equipment (Distribution boxes, lighting systems, cables...)
- Heating, ventilation, air conditioning – System (HVAC)
- Complete camp solution, including supply, installation, maintenance and much more.