
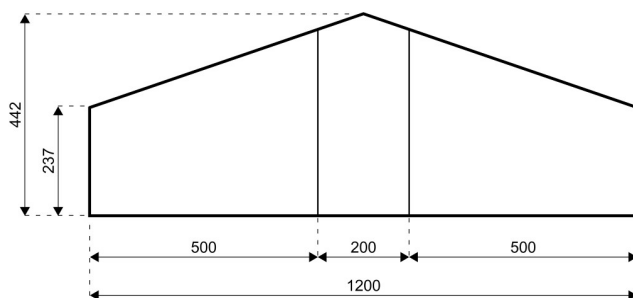


SINGLE STOREY BUILDING
A FRAME

Specifications

- Eave height: 2.37m to 6.00m
- Span width: 10.00m to 60.00
- Ridge height: 4.42m
- Bay distance: 5.00m
- Roof pitch: 18°
- Number of gable uprights: 2 Gable upright (per end)
- Longest component: 6.60m
- Minimum length: 10.00m
- Maximum length: Unlimited in 5.00m increments
- Max allowed wind speed: 102 km/h (0.50kN/m²)

- Main profile size: 173/80/3mm (4-channel)
- Eave connection type: Sliding connection
- Aluminum type: European - Hard Pressed Extruded Structural Aluminum
- Connecting components: European - hot dipped, structural grade corrosive resistant galvanised steel
- Roof covering type: Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

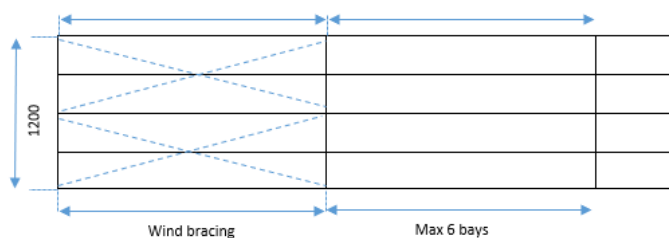

ACCESSORIES

